

CAPRI QUILT DIAGRAM FINISHED SIZE: 51-1/2" X 63"

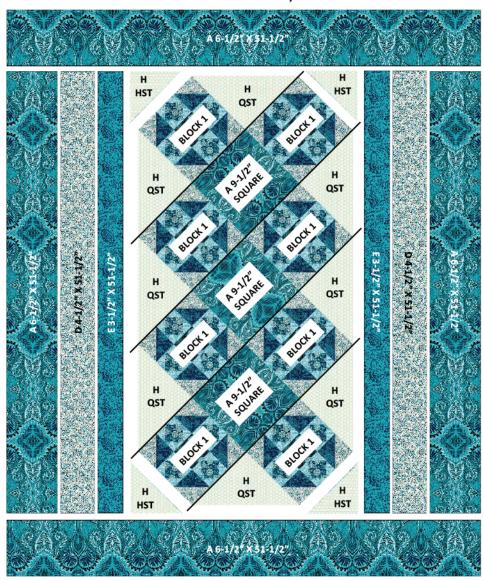

FINISHING: Cut batting and backing 3" larger than top on all sides. Layer backing, batting and top together and baste or pin. Quilt as desired. When quilting is completed, trim excess batting and backing. Bind as usual.

Note: If this Benartex pattern is included in a kit, any questions about the kit should be addressed to the vendor from whom you bought it.

BENARTEX, LLC • 132 WEST 36TH STREET, 4TH FLOOR • NEW YORK, NY 10018 •

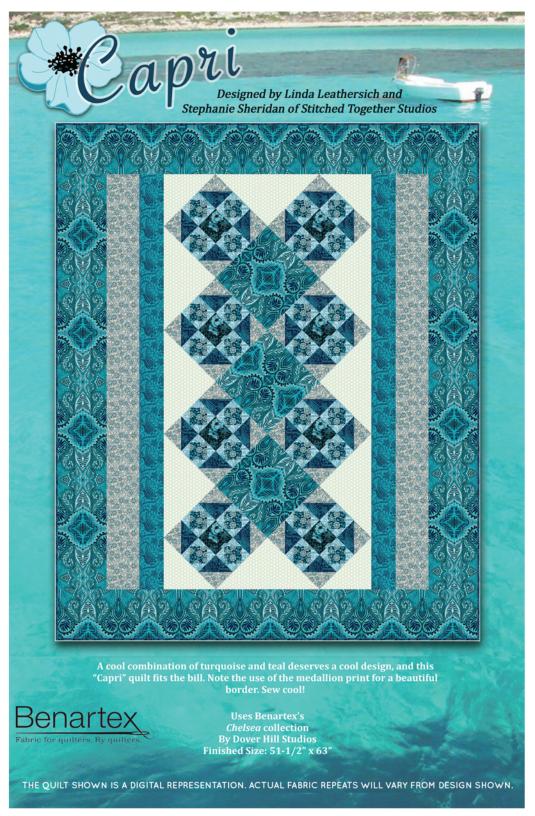

SAMPLE		KEY/SKU	QTY	CUT
	A	894-54 @ Addison Turquoise	2 YD	(1) 9-1/2" X WOF strip, fussy cut: (3) 9-1/2" squares From LOF fussy cut: (2) 6-1/2" X LOF strips, BORDER From remaining WOF fussy cut: (5) 6-1/2" X WOF strips*, BORDER
	В	895-54 Bayswater Turquoise	FQ	(8) 3-1/2" squares (Fussy Cut)
	С	897-54 Sloan Turquoise	1/3 YD	(3) 3-1/2" X WOF strips, subcut (32) 3-1/2" squares
	D	897-84 Sloan Light Turquoise	2/3 YD	(3) 4-1/2" X WOF strips *, SASHING (2) 4" X WOF strips, subcut (16) 4" squares
	Е	899-54 Brompton Turquoise	1/3 YD	(3) 3-1/2" X WOF strips *, SASHING
	F	899-55 Brompton Deep Blue	3/4 YD	(2) 4" X WOF strips, subcut (16) 4" squares (7) 2-1/4" X WOF strips *, BINDING
	G	899-84 Brompton Light Turquoise	1/2 YD	(7) 2" X WOF strips, subcut (128) 2" squares
	Н	900-84 Harrow Light Turquoise	2/3 YD	 (1) 14" X WOF strip, subcut (2) 14" squares, crosscut twice to create (8) QST (1) 7-1/4" X WOF strip, subcut (2) 7-1/4" squares, crosscut once to create (4) HST

WOF=WIDTH OF FABRIC LOF = LENGTH OF FABRIC @=DIRECTIONAL FABRIC
+ = EXTRA FABRIC ALLOWED FOR FUSSY CUTTING
* SEW STRIPS VIA SHORT ENDS THEN GO TO SASHING AND BORDER ASSEMBLY

UNIT DIAGRAMS

















BLOCK ASSEMBLY: Refer to UNIT and BLOCK DIAGRAMS

UNIT 1: (Square to 3-1/2", make 32)


- 1. Draw diagonal line on the back of all **G** 2" squares.
- 2. Place (1) **G** 2" square on the top left corner of (1) **C** 3-1/2" square. Sew on drawn line, then press open with seam allowance towards **C** fabric. Trim excess fabric on back to 1/4". Repeat on other 3 corners to complete **UNIT 1**.


UNIT 2: (Square to 3-1/2", make 32)

- 3. Draw diagonal line on the wrong side of **D** 4" square.
- 4. Place **D** 4" square on top of **F** 4" square. Sew seam 1/4" away on both sides of line, then cut on drawn line. Press the (2) half square triangles (HST) open with seam allowance towards the darker fabric to complete **UNIT 2**.

BLOCK 1: (Square to 9-1/2", make 8. Follow diagram for proper unit rotation)

5. Following diagram, sew **UNIT 1s**, **UNIT 2s** and **B** 3-1/2" square together into rows, then sew rows together.





QUILT ASSEMBLY: Refer to QUILT DIAGRAM for proper block placement.

- 6. Following quilt diagram, sew **BLOCK 1s**, **A** 9-1/2" squares and **H QSTs** together into diagonal rows, then sew rows together.
- 7. Sew (1) H HST onto each corner of quilt.
- 8. Trim quilt center to 1/4" beyond block points. Quilt center should measure approximately 26" X 51-1/2".

SASHING AND BORDER ASSEMBLY: Measure width and length of quilt top to ensure border cutting sizes. Below are our measurements

Sew (1) E 3-1/2" X (51-1/2") strip to each side of quilt.
 Sew (1) D 4-1/2" X (51-1/2") strip to each side of quilt.
 Sew (1) A 6-1/2" X (51-1/2") LOF strip to each side of quilt, then sew (1) A 6-1/2" X (52") WOF strip to top and bottom of quilt.