









# THE SPIRITS QUILT

by Janet Page Kessler

NOTE: This quilt is sewn together diagonally. Handle bias triangles with care.

KEY	FABRIC	QTY	CUT
	<b>A</b> Wild Horses 1912-30 Maize	1/4 YD	(2) 8 1/2" squares
	<b>B</b> Desert Geckos 1911-33 Tiger's Eye	1/2 YD	(2) 12 7/8" squares Cut in half diagonally.
	<b>C</b> Sandpaintings 1907-26 Rose Limestone	1/4 YD	(3) 8 1/2" squares
	<b>D</b> Navaho Blanket 1909-49 Olive	1/2 YD	(16) 2 1/2" x 12" strips for sashing
	<b>E</b> Pueblos 1906-43 Golden Sage	1/8 YD	(12) 2 1/2" squares
	<b>F</b> Indian Blanket 1908-77 Woodbark	1/3 YD	(2) 8 7/8" squares Cut in half diagonally to yield 4 triangles.
	<b>G</b> Gecko Texture 1913-78 Cinnamon	3/4 YD	(5) 4 1/2" x WOF* for border
	<b>H</b> Painted Desert Texture 1914-26 Red Stone	1/2 YD	(10) 6 7/8" squares Cut in half diagonally to yield 20 triangles.


\*Width of Fabric


Finished size: 46" square

1/4" seam allowances have been added throughout.

**IMPORTANT:** Continually refer to photo and diagram for correct color placement and orientation of fabrics.


1) Sew red triangles **H** to all sides of 8 1/2" **C** and **A** squares.

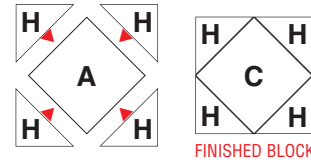


2) **ROW 1:** Sew 2 1/2" square **E** to either end of sashing strip **D**. 

Sew this sashing unit to triangle **F**.


3) **ROW 2:** Sew sashing strips **D** to both left and right sides of center block **C/H**. Then add left and right triangles **B** to center block. Sew another sashing strip as follows: **E-D-E-D-E-D-E**. Add this sashing unit to the bottom of **ROW 2**.

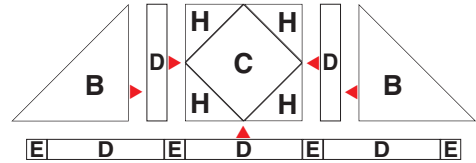

4) **ROW 3:** Sew sashing strips **D** to the left and right sides of **A/H** picture block. Add sashing strip **D** to the right side of middle picture block **C/H**. Next, add sashing strip **D** to the right side of final **A/H** block. Sew all three units together to make a row. Add triangles **F** to the left and right of row. Make another sashing strip as follows: **E-D-E-D-E-D-E**. Add this sashing unit to the bottom of **ROW 3**.

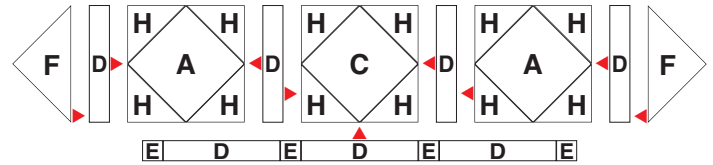


5) **ROW 4:** Sew sashing strips **D** to left and right sides of remaining **C/H** block. Sew triangles **B** to left and right sides of block. Make another sashing strip as follows: **E-D-E**. Add this sashing unit to bottom of **ROW 4**.

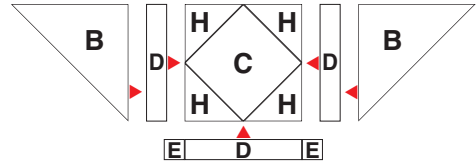

6) Begin sewing rows together, **ROW 1** to **ROW 2**, etc. End with triangle **F** in **ROW 5**.

7) When all rows are joined, square the quilt top by trimming the yellow squares so that they are even with the edge of the quilt.

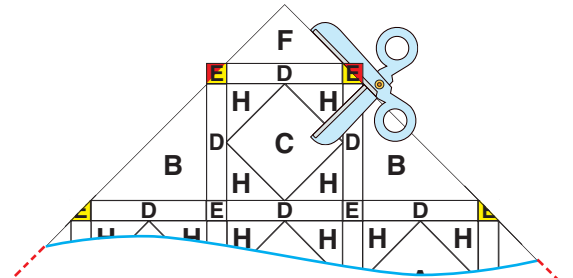

8) Add borders to top and bottom of quilt center. trim to fit. Next add borders to sides. Trim to fit.

9) Cut batting and backing 2" larger than top on all sides. Assemble the quilt "sandwich" by placing the backing, batting and top together in layers and baste or pin with safety pins. Machine quilt as desired. When machine quilting is completed, trim excess batting and backing. Bind in the usual manner.

